

STATIC PULVERIZER DEMOLITION TOOLS



The Rammer® RPV Static Pulverizer is ideally suited to a wide range of secondary demolition and recycling duties. The RPV range of models are designed for fast and effective material separation, a key aspect of the recycling process

APPLICATIONS





MAIN FEATURES AND BENEFITS

INCREASED PRODUCTIVITY

Shorter working cycles increases productivity

FIELD REPLACEABLE WEAR PARTS

Designed for quick and easy maintenance

RAMMER READY

Same bolt pattern as Rammer hammers


HEAVY DUTY COMPONENTS

Extreme durability for any application ensures long component life span





Rammer® RVP07S

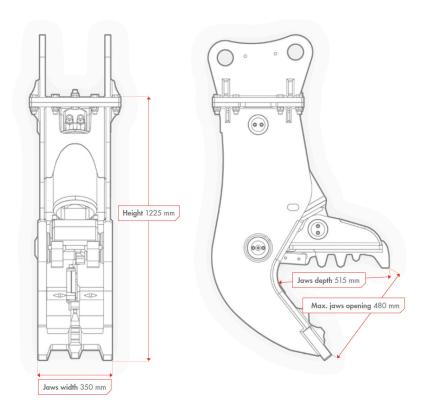

S	pec	ific	cat	ior	าร
•	PU	,,,,,	Jui	101	10

Minimum working weight	1080 lbs (490 kg)		
Weight	930 lbs (420 kg)		
Max jaw opening	18.9" (480 mm)		
Jaw width	13.8" (350 mm)		
Max operating pressure	4060 psi (280 bar)		
Max diameter to be cut	0.98" (25 mm)		
Cutting blade length	4.72" (120 mm)		
Rotation	0°		
Closing time at max oil flow	3.4 s		
Opening time at max oil flow	2.4 s		
Carrier weight range	8800 lbs-22000 lbs (4-10 T)		

Specifications are subject to change without notice



Developed and tested in the harshest of conditions, the foundations of Rammer products are quality, operational reliability and maximized productivity. Long working life and durability ensure our attachments can be used efficiently and economically no matter the challenge at hand, making Rammer a sustainable choice.

Sandvik Rock Processing Solutions

www.rammer.com

