

M15



BRETEC M15 SILENCED

FEATURES

VIBRATION DAMPENING

SOUND SUPPRESSION

SERVICE FRIENDLY

EASY TO SERVICE

MASSIVE TOOL SIZE

FAST TOOL CHANGE SYSTEM

FULL MANUFACTURER WARRANTY

BENEFITS

Less vibration/damage to the carrier

Environmentally friendly and compliant with regulations

Less downtime, more productive

Lower owning & operating costs

Better productivity and durability

Easy to operate and maintain

Reliable and carefree to own

SPECIFICATIONS

Minimum working weight, flange mounted	kg (lb)	930 (2050)
Breaker weight	kg (lb)	770 (1700)
Impact rate	bpm	450 - 750
Operating pressure	bar (psi)	130 - 160 (1885 - 2320)
Pressure relief, min	bar (psi)	200 (2900)
Pressure relief, max	bar (psi)	220 (3190)
Oil flow range	l/min (gal/min)	80 - 110 (21.1 - 29.1)
Back pressure, max	bar (psi)	10 (145)
Tool diameter	mm (in)	100 (3.94)
Pressure line connection (P)	BSPP internal 3/4"	
Return line connection (T)	BSPP internal 3/4"	
Miniexcavator/Carrier weight	t (lb)	10.0 - 16.0 (22000 - 35300)
Noise level, measured (Directive 2000/14/EC)	dB(A)	124
Noise level, guaranteed (Directive 2000/14/EC)	dB(A)	128

TOOLS

Chisel

Part number	No.	BA151	
Diameter	mm (in)	100 (3.94)	
Length	mm (in)	950 (37.4)	
Weight	kg (lb)	52 (114)	

Moil Point

Part number	No.	BA153	
Diameter	mm (in)	100 (3.94)	
Length	mm (in)	950 (37.4)	
Weight	kg (lb)	50 (110)	


Pyramid

Part number	No.	BA153K3	
Diameter	mm (in)	100 (3.94)	
Length	mm (in)	950 (37.4)	
Weight	kg (lb)	50 (110)	

Blunt

Part number	No.	BA154	
Diameter	mm (in)	100 (3.94)	
Length	mm (in)	850 (33.46)	
Weight	kg (lb)	49 (108)	

DIMENSIONS

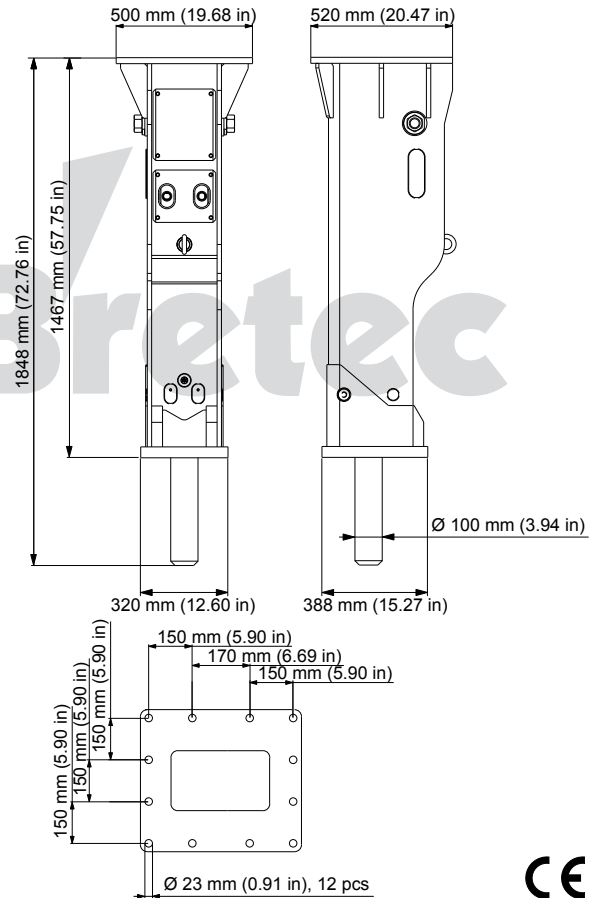

ACCESSORIES

Accumulator charging kit	166460 (included to the kit)
Bretec Tool box B4	173745 (included to the kit)
Grease gun	90202
Bretec tool grease, 400 g	954353
Bretec tool grease, 18 kg	954269

SERVICE KITS

Service Kit 1	K10B15
Service Kit 2	K20B15

ORDER KITS

Breaker kit order code	K01BT15A010
Breaker + Chisel kit order code	K06BT15A010